


# ➤ ETX<sup>®</sup>-PM



original size

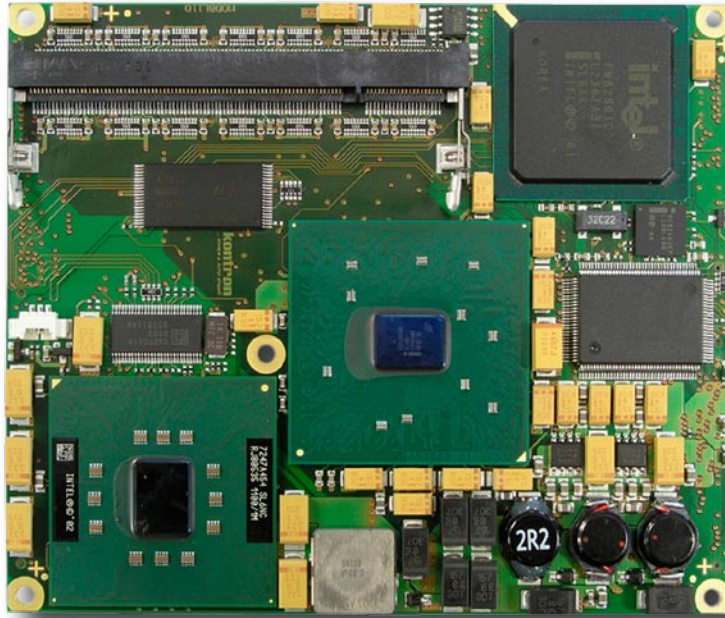

- Embedded Technology eXtended
- Intel<sup>®</sup> Pentium<sup>®</sup> M Processors up to 1.8 GHz
- USB 2.0 and DDR-SDRAM up to 1 GByte
- Ultimate Performance without the heat

## Product Overview

The ETX®-PM products feature the Intel® Celeron® M Processor or Intel® Pentium® M Processor with the unique Enhanced Speed Step™ technology. The ETX®-PM modules offer supreme computing performance at extreme low power consumption. Supporting up to 1Gbyte of DDR-SDRAM technology the memory bandwidth is no longer the performance bottleneck. The integrated Intel Extreme Graphics 2 video controller offers resolutions up to 2048x1536 pixel with 2D and 3D acceleration. The JILI display interface technology ensures automatic setting of the video controller parameters for the attached LCD panel. The 4 USB channels support USB 2.0 with full bandwidth for the coming generations of I/O devices. As

all boards in the ETX® product line the ETX®-PM is fully featured with PCI 2.1 bus, audio, ethernet, floppy/printer, IDE, serial ports and keyboard/mouse interfaces.

ETX® modules are like components, plugging into an application-specific baseboard. The ETX® modules supply the core CPU and memory subsystems together with sound, QXGA, Ethernet and standard PC I/O. They connect to the rest of the embedded system through highdensity, low profile, surface-mount connectors, which carry both ISA (future option) and PCI bus signals as well as dedicated I/O interfaces. ETX® modules are scaleable and interchangeable, and they make possible the rapid development of semi-custom solutions for embedded applications.

## Technical Information

<b>Processor</b>	Intel® Pentium® M processor 1.1 GHz LV and 1.6 GHz Intel® Pentium® M processor 738 LV and 745 Intel® Celeron® M processor 600 MHz, ULV 373 (1.0 GHz) and 1.3 GHz
<b>Chipset</b>	Intel® 82855GME, 400MHz FSB, integrated graphics Intel® 82852GM, 400MHz FSB, integrated graphics
<b>DRAM</b>	1 GByte mx. DDR-SO-DIMM, PC1600/2100
<b>Cache</b>	up to 2MByte 2 <sup>nd</sup> Level
<b>Harddisk</b>	Two enhanced IDE ports
<b>Sound</b>	AC97 controller, line-input / output and microphone
<b>Video Controller</b>	Intel Extreme Graphics2 controller, LVDS Flatpanel and CRT output, Up to 32 MByte UMA Video RAM
<b>Resolutions CRT and LCD</b>	max CRT WUXGA/QXGA (2048x1536), max LCD WUXGA/UXGA (1600x1200)

<b>LCD Panel Support</b>	Dual Channel LVDS 110 MHz
<b>Serial Interfaces</b>	2x TTL (16550 compatible), IrDA support
<b>Enhanced Parallel Port</b>	shared with Floppy
<b>Floppy Port</b>	shared with LPT
<b>Ethernet</b>	10/100Base-T Intel® 82562
<b>USB</b>	4x USB 2.0 OHCI ports
<b>Dimensions</b>	95 x 114mm (3.7x4.5")
<b>Power Consumption</b>	18W @ 5V (1.1 GHz CPU) typ
<b>Temperature (*)</b>	operation: 0° to 60°C, storage: -30° to 85°C
<b>Humidity</b>	operation: 10% to 90%, storage: 5% to 95% (non condensing)

(\*) Ask about wider temperature ranges

## Ordering Information

Article	Part.-No.	Description
ETX®-PM11	18008-0000-11-0	ETX® module with Intel® Pentium® M processor LV 1.1 GHz and Intel® 82855GME chipset
ETX®-PM14	18008-0000-14-2	ETX® module with Intel® Pentium® M processor LV 738 (1.4 GHz) and Intel® 82855GME chipset
ETX®-PM16	18008-0000-16-0	ETX® module with Intel® Pentium® M processor 1.6 GHz and Intel® 82855GME chipset
ETX®-PM18	18008-0000-18-2	ETX® module with Intel® Pentium® M processor 745 (1.8 GHz) and Intel® 82855GME chipset
ETX®-PM06C	18008-0000-06-1	ETX® module with Intel® Celeron® M processor ULV 600 MHz and Intel® 82855GME chipset
ETX®-PM06C/852	18008-0000-06-4	ETX® module with Intel® Celeron® M Processor 600 MHz, 512 KB L2 and Intel® 82852GM chipset
ETX®-PM08C cacheless	18008-0000-08-3	ETX® module with Intel® Processor 800 MHz 0KB L2 and Intel® 82855GME chipset
ETX®-PM10C	18008-0000-10-1	ETX® module with Intel® Celeron® M processor ULV 373 (1.0 GHz) and Intel® 82855GME chipset
ETX®-PM13C	18008-0000-13-1	ETX® module with Intel® Celeron® M processor 1.3 GHz and Intel® 82855GME chipset
ETX®-PM15C	18008-0000-15-1	ETX® module with Intel® Celeron® M processor 370 (1.5 GHz), Intel® 82855GME chipset
ETX®-PM HSP	18008-0000-99-4	Heatspreader ETX®-PM, Threaded Hole Stand Off for boards from CE 3.X.X a. Intel® 82855GME chipset
ETX®-PM HSP	18008-0000-99-5	Heatspreader ETX®-PM, Through Hole Stand Off for boards from CE 3.X.X a. Intel® 82855GME chipset
DDR SDRAM SODIMM 512	97007-5120-00-0	DDR SDRAM SODIMM with 512 GB
DDR SDRAM SODIMM 1 GB	97007-1024-00-0	DDR SDRAM SODIMM with 1 GB

## Corporate Offices

### Europe, Middle East & Africa

Kontron AG  
Oskar-von-Miller-Str. 1  
85386 Eching/Munich  
Germany  
Tel.: +49 (0)8165/ 77 777  
Fax: +49 (0)8165/ 77 219  
sales@kontron.com

### North America

Kontron America Corporate Office  
14118 Stowe Drive  
Poway, CA 92064-7147  
USA  
Tel.: +1 888 294 4558  
Fax: +1 858 677 0898  
sales@us.kontron.com

### Asia Pacific

Kontron Asia Inc.  
4F, No. 415, Ti-Ding Blvd.  
Sec.2, NeiHu District  
Taipei Taiwan 114  
Tel.: +886-2-2799-2789  
Fax: +886-2-2799-7399  
sales@kontron.com.tw

### Kontron Embedded Modules

Brunnwiesenstr. 16  
94469 Deggendorf  
Germany  
Tel.: +49 (0)991/ 370 24-100  
Fax: +49 (0)991/ 370 24-333  
sales@kontron.com