




MOPS-PM



powered by
Intel® Pentium® M

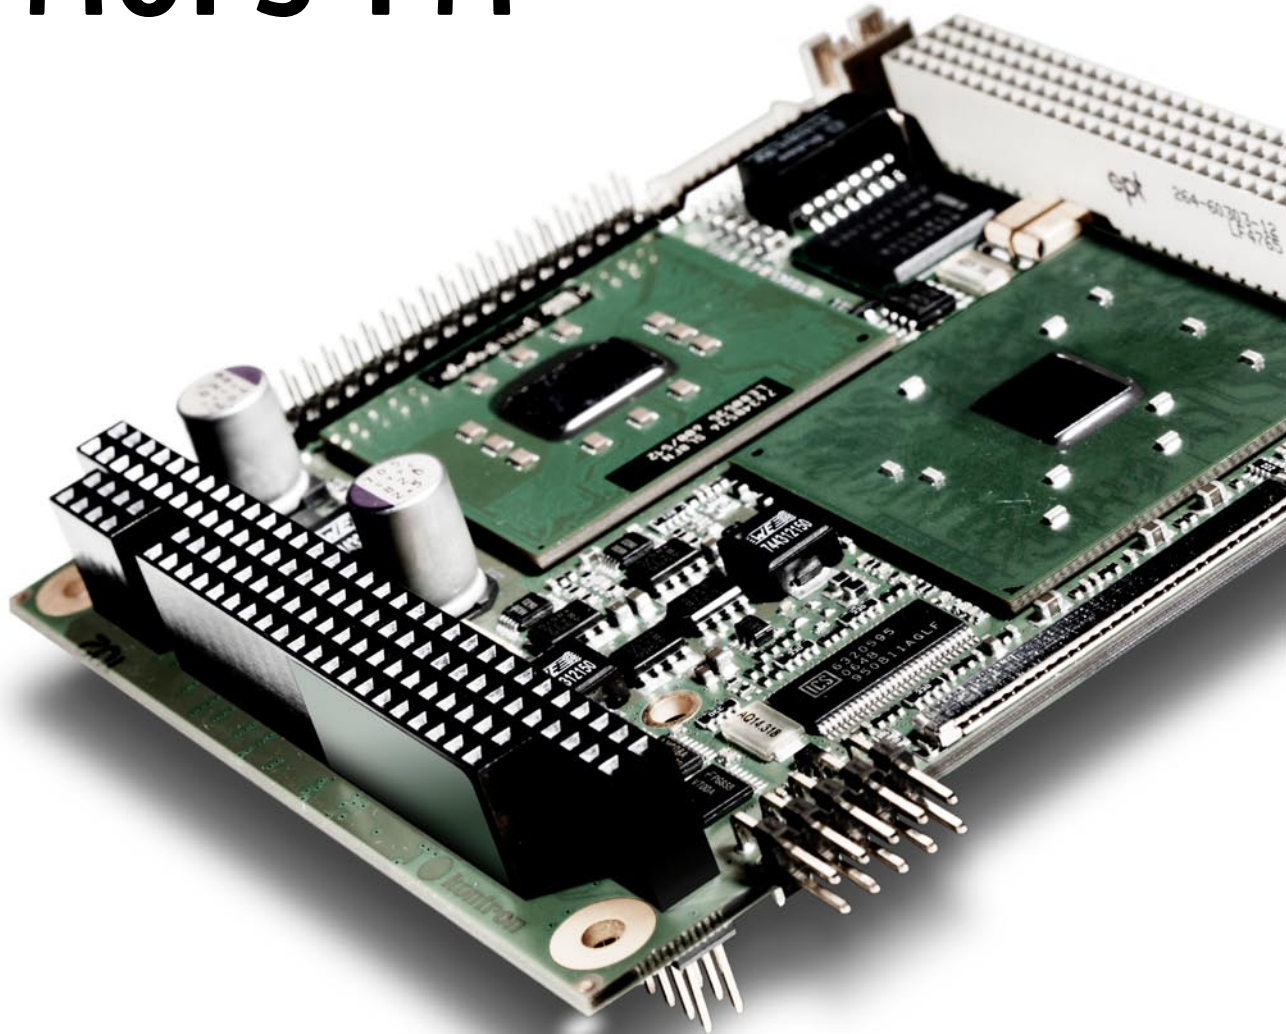

▶ Small

just classic PC/104 size (90x96 mm)

▶ Fast

Intel® Celeron® M and Intel® Pentium® M performance

▶ Communication

2xCOM, 2x USB 2.0, LAN, CRT/TFT
and PC/104plus for ISA and PCI add-ons

➤ Product Overview

The MOPS-PM is an „all in one“ Intel® Pentium® M based PC/104plus with consistent 90x 96 mm classic PC/104plus size.

Despite the very compact 90x 96 mm size format it's possible to integrate the ISA- & PCI-bus and a full featured set of interfaces. Beside all standard interfaces (2 COM ports, LAN, CRT, LPT, EIDE, 2 USB) a high speed on chip video controller (Intel® Extreme Graphics 2 engine) is available.

It can operate CRT monitors and LCD flat panels in parallel even with different screen content.

Flatpanel displays with highest resolutions can be connected. Up to 64 MByte of video memory (UMA) are already on chip at the graphic controller. JILI30 allows extremely low cost LVDS TFT apanel adaption. An adaptor even enables connection to TTL panels.

➤ Technical Information

Processor	Intel® Pentium® M (Dothan), 1.4GHz, 2MB L2 Intel® ULV Celeron® M (Dothan), 1.0GHz, 512KB L2 Intel® Mobile Celeron® M processor 600MHz, 512KB L2
Chipset	Intel® 855GM/852GME, ICH4
On chip Graphics	Intel® Extreme Graphics 2 engine 2x 32 MByte VRAM UMA
SDRAM	DDR-RAM-SODIMM socket up to 1GByte
Graphic	onchip engine with shared 2x 32MB DDR VRAM
Panel / CRT	✓ / ✓ LVDS by JILI30, TTL via Adapter and CRT
10/100 BaseT Ethernet	✓ (Intel®)
USB	2x USB 2.0, with Legacy support
EIDE Interface	✓ (44pin, 2mm)
Printer interface	✓ (flatfoil)

Keyboard / Mouse Controller	✓ / ✓
RS232C	2x
LANBoot	✓ PXE
DarkBoot	✓
Watchdog	✓
Real Time Clock	✓
Dimensions	96x90 mm, (3.8 x 3.6")
Power supply	5V only
Temperature (*)	Operation: 0° to 60°C (with appropriate airflow) Storage: -10° to 85°C
Max. humidity	Operation: 10% to 90% Storage: 5% to 95% (non condensing)

(*) Ask about wider temperature ranges

➤ Ordering Information

Article	Part.-No.	Description
MOPS-PM	01060-0000-06-3	Intel® Processor Celeron M 600MHz 512KB L2 cache (Banias); ISA&PCI
MOPS-PM	01060-0000-10-2	Intel® Processor Celeron M 1GHz Hz 512KB L2 cache (Dothan); ISA&PCI
MOPS-PM	01060-0000-14-2	Intel® Processor Pentium M 1.4 GHz 2MB L2 cache (Dothan), ISA&PCI
MOPS-PM-Coolerkit	01060-0000-99-0C01	Coolerset MOPS-PM active incl. fan
KAB-Adapt-LVDStoTTL	61029	Adapter to connect TTL Flat Panels to JILI30 Interface of MOPS-PM
KAB-DSUB25-2	61033	DSUB25 female Connectors to onboard flatfoil connector FOR MOPS-PM only
KAB-SBC-SET1	96002-0000-00-1	cable set for any SBC: PS/2 keyboard, IDE, printer, one serial port, PS/2 mouse, 10/100 LAN, USB and floppy adapter

➤ Corporate Offices

Europe, Middle East & Africa

Kontron AG
Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 219
sales@kontron.com

North America

Kontron America Corporate Office
14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
sales@us.kontron.com

Asia Pacific

Kontron Asia Inc.
4F, No. 415, Ti-Ding Blvd.
Sec.2, NeiHu District
Taipei Taiwan 114
Tel.: +886-2-2799-2789
Fax: +886-2-2799-7399
sales@kontron.com.tw

Kontron Embedded Modules

Brunnwiesenstr. 16
94469 Deggendorf
Germany
Tel.: +49 (0)991/ 370 24-100
Fax: +49 (0)991/ 370 24-333
sales@kontron.com