



Operating Guide

EPIA LN-Series Mini-ITX Mainboard

Table of Contents

Table of Contents	i
VIA EPIA LN-Series Overview	1
VIA EPIA LN-Series Layout	2
VIA EPIA LN-Series Specifications	3
VIA EPIA LN Processor SKUs	4
VIA CN700 Chipset Overview	5
VIA EPIA LN-Series I/O Back Panel Layout	6
VIA EPIA LN-Series Layout Diagram & Mounting Holes	7
VIA EPIA LN-Series Layout Diagram & Height Distribution	8
Power Consumption	9
VIA EPIA LN10000E.....	9
Power Specifications	11
VIA EPIA LN-Series Microsoft and Linux Driver Support	12
MICROSOFT DRIVER SUPPORT.....	12
LINUX DRIVER SUPPORT	12
Contact	13

VIA EPIA LN-Series Overview


The VIA EPIA LN-Series Mini-ITX Mainboard is an ultra compact native x86 platform optimized for today's demanding embedded and productivity applications. The mainboard is based on the VIA CN700 chipset featuring an embedded hardware MPEG-2 accelerator and integrated VIA UniChrome™ Pro 2D/3D graphics for rich digital media performance. With the sizable memory bandwidth of DDR2 533MHz SDRAM DIMM and the high data transfer speed of ATA-133 and further enhanced by support of 8-Channel AC'97 codec for Smart 5.1 surround sound and SPDIF, the VIA EPIA LN-Series delivers the increased performance levels required by today's embedded digital media applications.

The latest in high-bandwidth connectivity is supported with six USB 2.0 ports, as well as a COM port and has one 10/100 Fast Ethernet port for extended broadband connectivity. The VIA EPIA LN-Series also has one PCI slot for expandability options. The VIA EPIA LN-Series is compatible with a full range of Mini-ITX chassis as well as FlexATX and MicroATX enclosures and power supplies.

The VIA EPIA LN-Series is fully compatible with Microsoft® and Linux operating systems and is available in a variety of configurations, including the latest VIA C7™ V4 Bus NanoBGA2 processor for small, low power and secure x86 processor platforms.

VIA EPIA LN-Series Layout

VIA EPIA-LN Mini-ITX Mainboard (Dimension 17cm x 17cm)

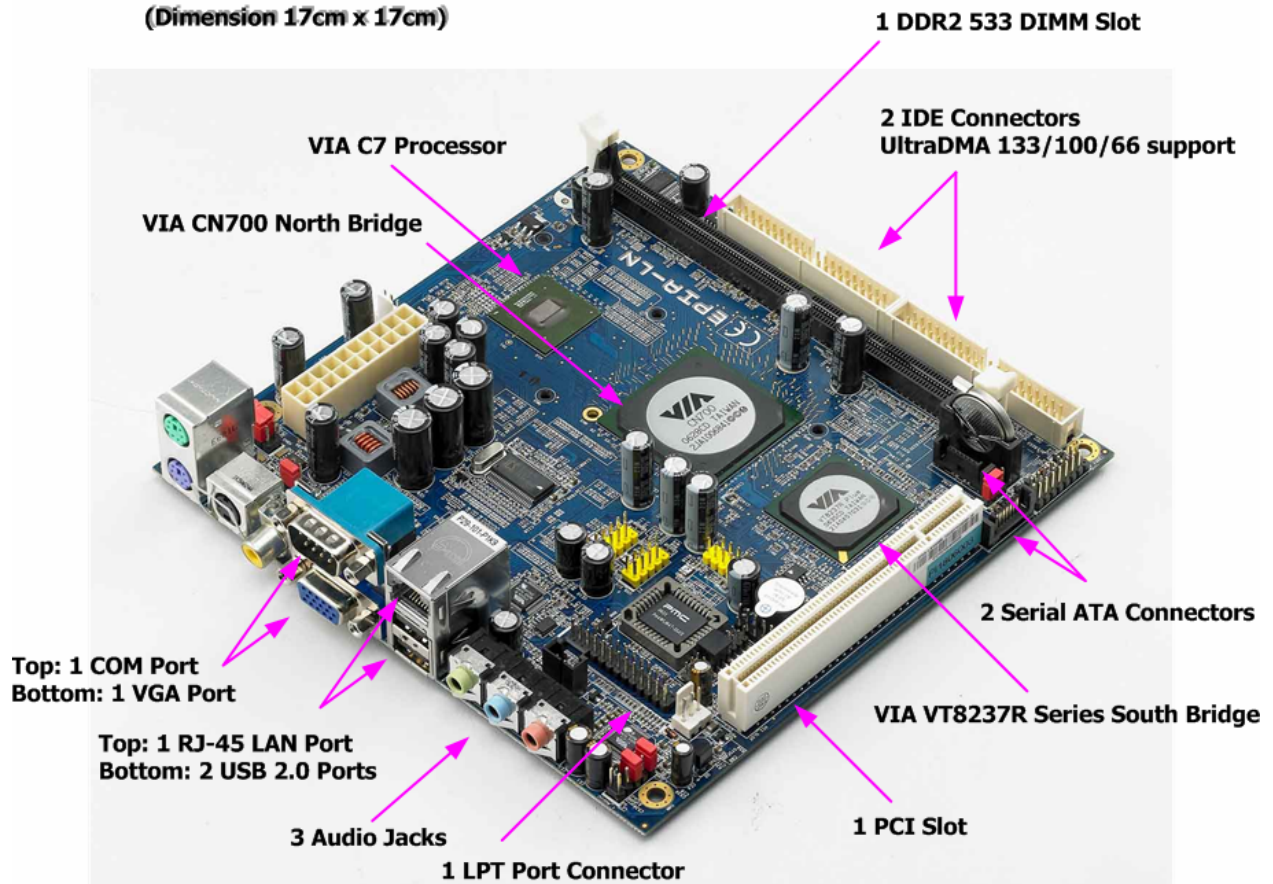

VIA EPIA LN-Series Specifications

Model Name	- EPIA - LN10000E
Processor	- VIA C7 1.0GHz NanoBGA2
Chipset	- VIA CN700 North Bridge - VIA VT8237R-Series South Bridge
System Memory	- 1 DDR2 533 DIMM slot - Up to 1GB memory size
VGA	- Integrated VIA UniChrome™ Pro AGP graphics with MPEG-2 acceleration
Expansion Slots	- 1 PCI
Onboard IDE	- 2 UltraDMA 133/100/66 Connectors
Onboard Serial ATA	- 2 SATA Connectors
Onboard LAN	- VIA VT6103 10/100 Base-T Ethernet PHY
Onboard Audio	- VIA VT1618 8 channel AC'97 Codec
Onboard TV Out	- VT1622AM SDTV Encoder
Onboard I/O Connectors	- 3 USB pin header for 6 additional USB 2.0 ports - 1 LPC connector - 1 LPT connector - 1 Front-panel audio pin header (Mic-in and Line-out) - 1 Front-panel pin header - 1 CIR pin header (Switchable for KB/MS) - 2 Fan connectors: CPU/Sys FAN - 1 FIR pin header - 1 SMBus pin header - 1 S/PDIF Out connector - 1 Buzzer - 1 ATX Power Connector
Back Panel I/O	- 1 PS2 Mouse port - 1 PS2 Keyboard port - 1 Serial port - 1 VGA port - 1 RJ-45 LAN port - 2 USB 2.0 ports - 3 Audio jacks: line-out, line-in and mic-in (Horizontal, Smart 5.1 Support) - 1 RCA jack for composite TV output - 1 S-Video port
BIOS	Award BIOS, LPC 2/4/8Mbit flash memory
Operating System	Windows 2000 / XP, Linux, Win CE, XPe
System Monitoring & Management	- System voltage monitoring - CPU/SYS Fan speeding monitoring - RTC timer power-on, Wake-on-LAN/Ring/Keyboard/Mouse, AC power failure recovery
Operating Temperature	0 ~ 50°C
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)
Form Factor	- Mini-ITX (4-layer) - 17 cm x 17 cm

* The specification is subject to change without prior notice.

VIA EPIA LN Processor SKUs

The VIA EPIA LN-Series is available in 1.0GHz speed grades. The VIA EPIA LN10000E utilizes the most efficient VIA C7™ V4 Bus NanoBGA2 processor.



EPIA LN10000E

VIA C7™ V4 Bus processor
1.0 GHz
1.004v Operating Volts
128KB L1 Cache
128KB L2 Cache
MMX, SSE, SSE2 and SSE3
Padlock and ACE Encryption




Suitable for small, low power, ultra efficient and secure x86 platform.



PadLock ACE US government approved Advanced Encryption Standard (AES), performing cryptographic functions for securing e-mails, personal files, online transactions, and networks.


VIA CN700 Chipset Overview

The VIA CN700 Chipset is designed to enable high quality digital video streaming and DVD playback in a new generation of fanless, small form factor PCs and IA devices. The [CN700](#) features the embedded VIA UniChrome™ Pro 2D/3D MPEG-2 acceleration, DDR2 533/400MHz support, motion compensation and duo-view support to ensure a rich overall entertainment experience. Outstanding connectivity features include USB 2.0, 10/100 LAN and ATA/133.

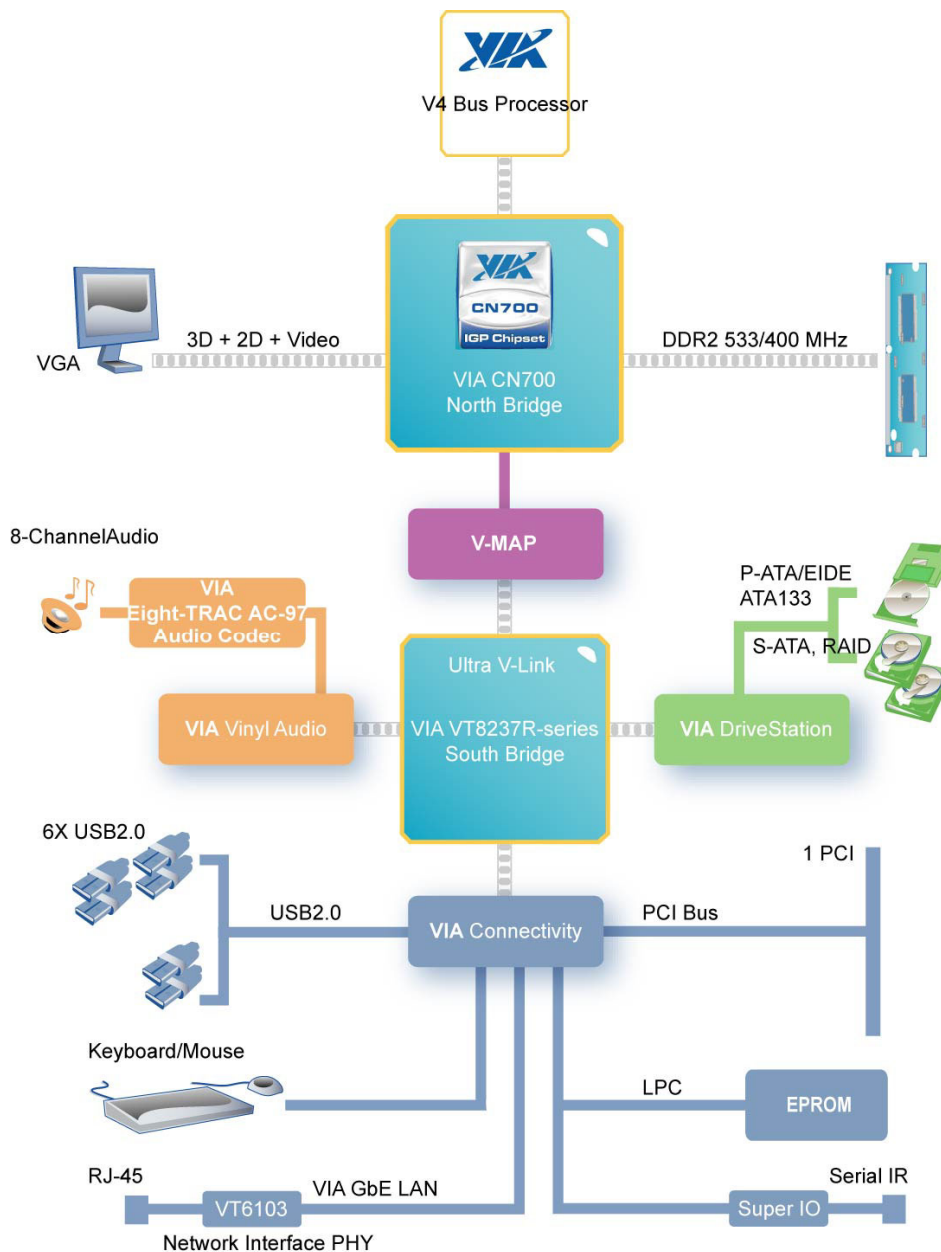


VIA EPIA LN-Series I/O Back Panel Layout


The EPIA LN's ultra compact 17cm x 17cm, integrated design supports all the standard legacy x86 connectivity options as well as PS/2 Mouse port, PS/2 Keyboard port, VGA port, COM port, RJ45 LAN port, USB 2.0 ports, composite RCA jack, S-Video port and audio jacks.

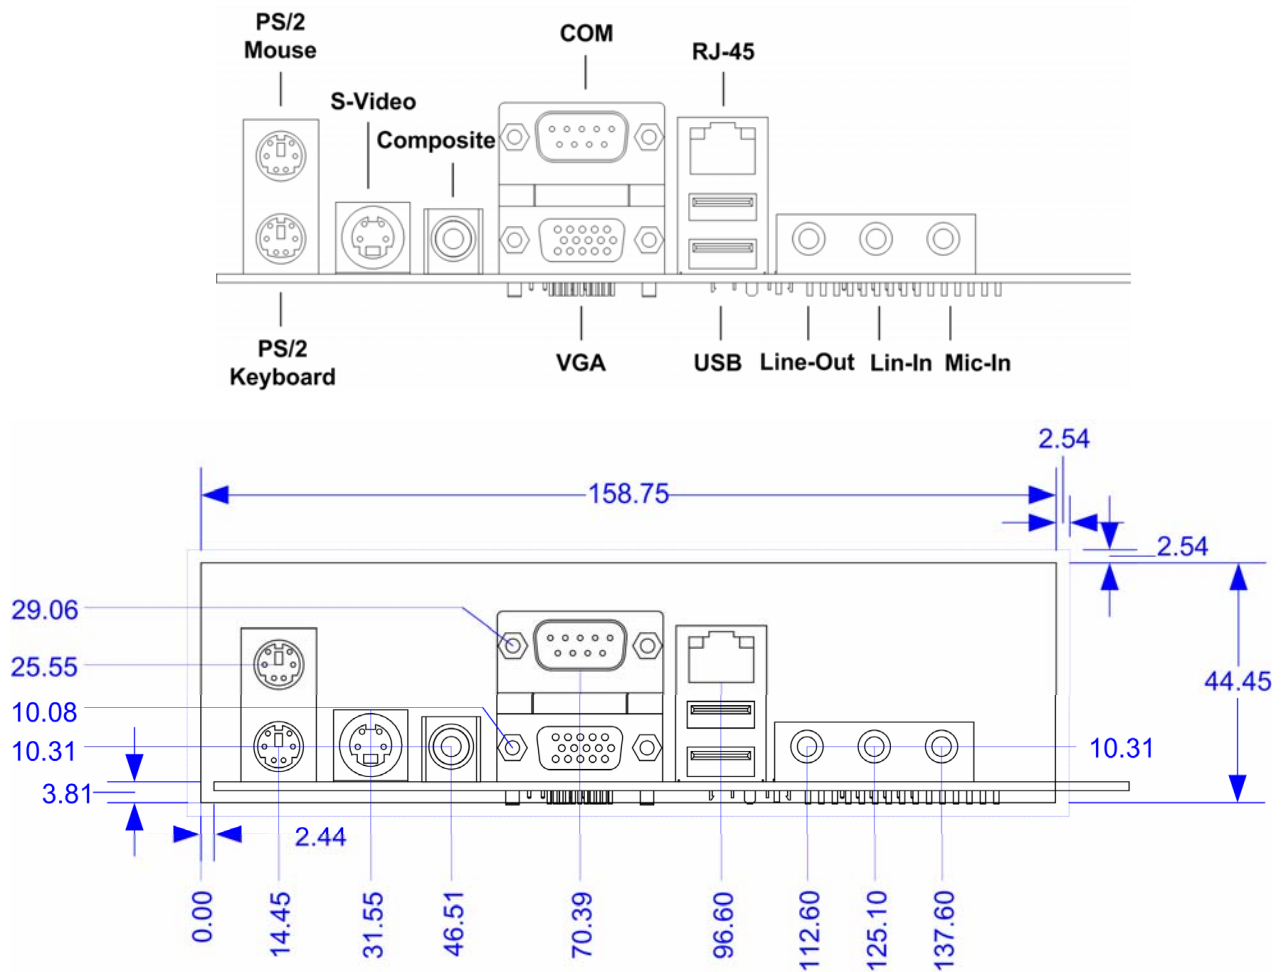

VIA EPIA LN-Series Layout Diagram & Mounting Holes

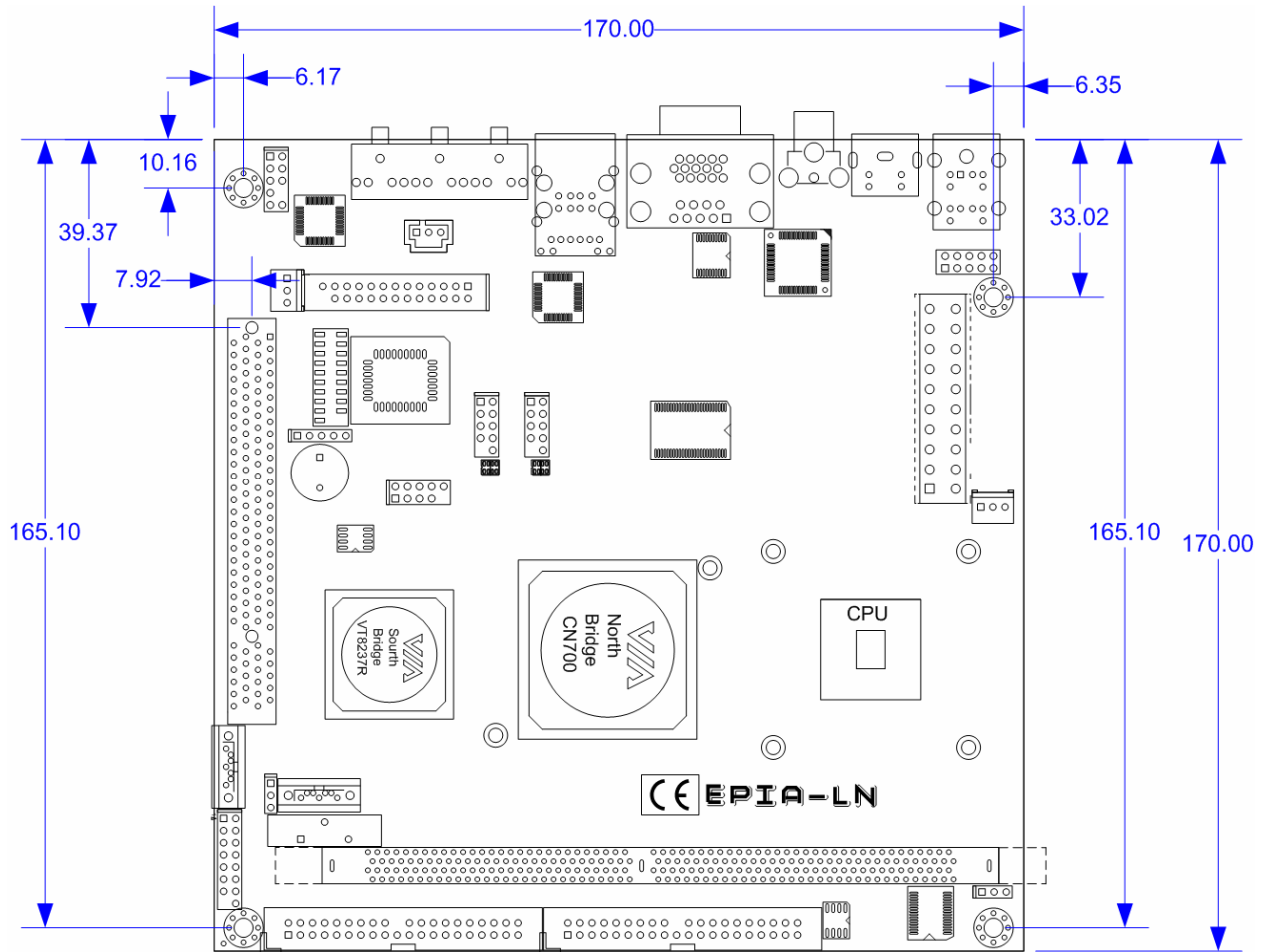

VIA EPIA LN-Series Layout Diagram & Height Distribution

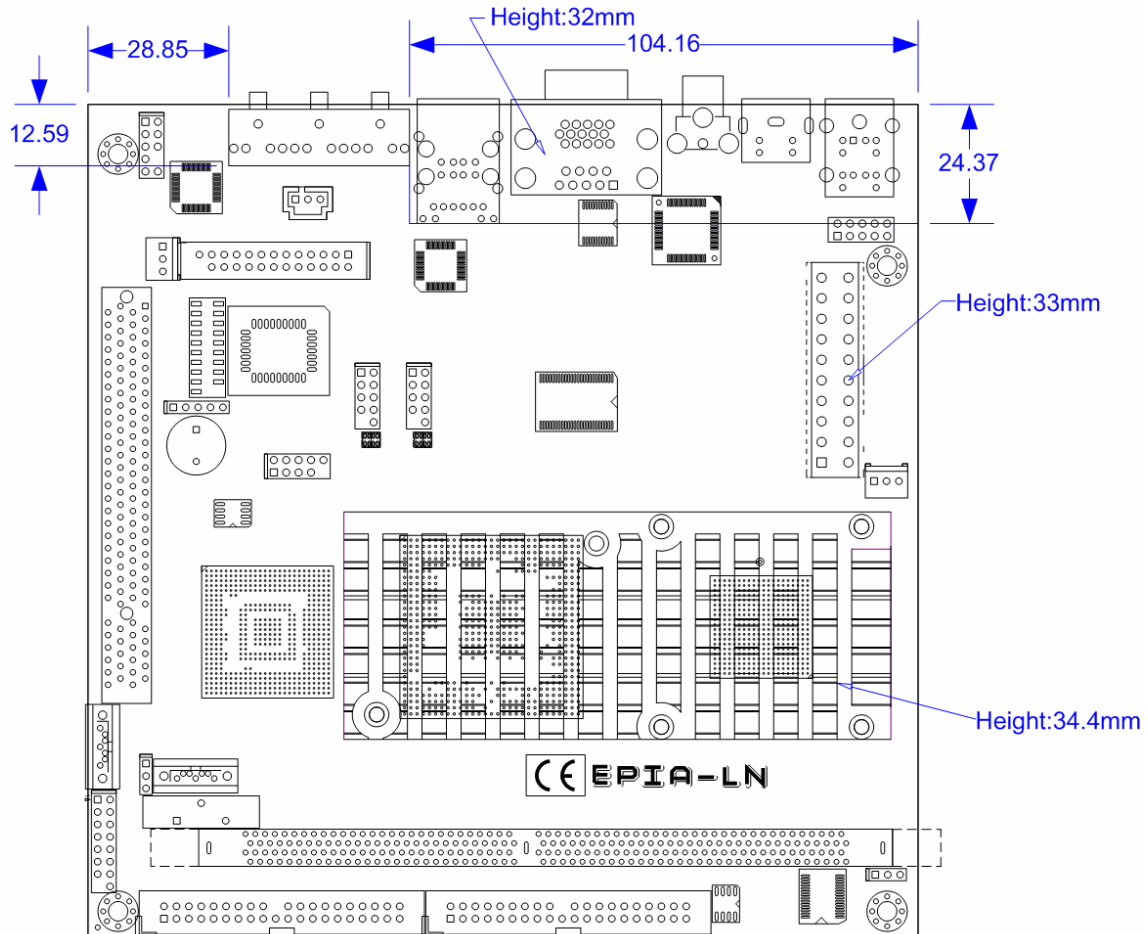

Else height under 21mm

Power Consumption

Power consumption tests were carried out comparing the VIA EPIA LN10000E (running with the 1.0GHz VIA C7™ V4 Bus NanoBGA2 processor). The following tables are a comprehensive breakdown of the EPIA platform's voltage, amp and wattage values while running common system applications.

VIA EPIA LN10000E

A. IDEL Status

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.255	2.267	7.379
Main Board +5V	5.079	0.487	2.473
Main Board 5VSB	1.968	0.093	0.183
Main Board +12V	12.012	0.198	2.378
Main Board Power Consumption			12.414

B. MP3 Playing

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.242	2.427	7.868
Main Board +5V	5.056	1.133	5.728
Main Board 5VSB	4.962	0.092	0.457
Main Board +12V	12.029	0.196	2.358
Main Board Power Consumption			16.411

C. DVD Playing

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.236	2.527	8.177
Main Board +5V	5.057	1.008	5.097
Main Board 5VSB	4.959	0.091	0.451
Main Board +12V	12.021	0.195	2.344
Main Board Power Consumption			16.070

D. S3 Status

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	0.032	-0.034	-0.001
Main Board +5V	0.003	-0.028	0.000
Main Board 5VSB	5.000	0.135	0.675
Main Board +12V	-0.001	-0.006	0.000
Main Board Power Consumption			0.674

E. Run C.C. Winstone 2001


	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.243	2.329	7.553
Main Board +5V	5.058	1.099	5.559
Main Board 5VSB	4.962	0.091	0.452
Main Board +12V	12.020	0.193	2.320
Main Board Power Consumption			15.883

F. Data Download from Network

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.241	2.332	7.558
Main Board +5V	5.072	0.752	3.814
Main Board 5VSB	4.966	0.092	0.457
Main Board +12V	12.012	0.195	2.342
Main Board Power Consumption			14.171

Power Specifications

The EPIA LN utilizes an industry standard 20-pin ATX main connector to the power supply. Due to the EPIA LN platform's ultra low power requirements a 90 – 120 Watt ATX power supply is ample for even the heaviest of multimedia system applications.

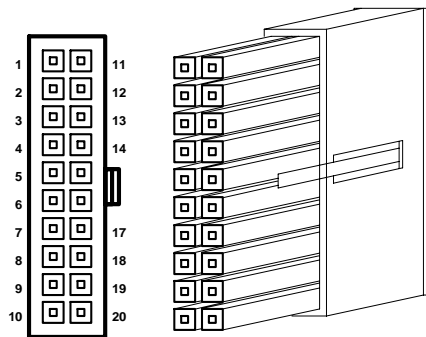

1	+3V	11	+3V
2	+3V	12	-12V
3	Gnd	13	Gnd
4	+5V	14	PWR_ON-
5	Gnd	15	Gnd
6	+5V	16	Gnd
7	Gnd	17	Gnd
8	PWR_GD	18	NC
9	5V_SB	19	+5V
10	+12V	20	+5V

Note: NC = no connection

VIA EPIA LN-Series Microsoft and Linux Driver Support

Microsoft Driver Support

VIA EPIA LN series offers full support for the complete range of Microsoft operating systems.

For standard operating systems, Windows 98/Me/2000/XP latest drivers downloads can be found in the VEPD website at www.viaembedded.com.

For embedded operating systems, Windows CE.NET and XP Embedded related driver supports can be found in the VIA Arena website at www.viaarena.com.

Linux Driver Support

VIA EPIA LN mainboards have a very high degree of support under Linux.

Support and drivers are provided through various methods including:

- Drivers provided by VIA
 - Using a driver built into a distribution package
 - Visiting VIA Arena website at www.viaarena.com for latest updates on a monthly basis
- Installing a third party driver (such as the ALSA driver from the Advanced Linux Sound Architecture project for integrated audio)

For OEM clients and system integrators developing a product for long term production, other code and resources may also be made available. You can submit a request either through the [Developers portal](#) on VIA Arena, or through your VEPD support contact. Alternatively, VIA can work further towards providing additional drivers to suite your specific needs.

Contact

For more information on the VIA EPIA LN-Series Mini ITX Mainboard contact your sales representative or visit our website at www.viaembedded.com

USA

440 Mission Court, Suite 220
Fremont, CA 94539
Tel: (510) 683 3300
Fax: (510) 687 4654
Email: vpsd_sales@viatech.com

Germany

Mottmann Strasse 12
53842 Troisdorf-Oberlar
Tel: 2241 397780
Fax: 2241 3977819
Email: sales@via-tech.de

Taiwan

1F, No. 531, Chung Cheng Road
Hsin Tien, Taipei
Tel: (02) 2218 5452
Fax: (02) 2218 5453
Email: mkt@via.com.tw

China

6F, DAscom Tower
9 Shangdi East Road
Haidian District
Beijing, 100085
Tel: 10 6296 3088
Fax: 10 6297 2929
Email: vpsdbj@viatech.com.cn